



1. Open up new DTR600/700 profile
2. Switch to ADVANCED view

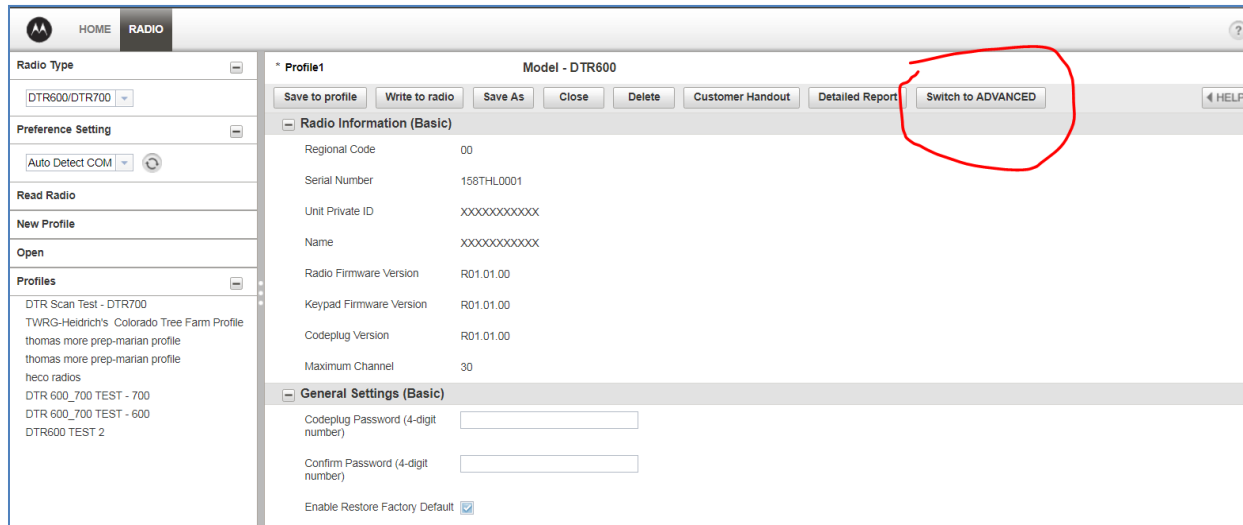


3. Add new Private Contacts based on individual radio ID numbers
  - a. ID number is displayed on the radio display when turned on (usually starts with 1717)
  - b. Make sure all private ID's are the same hopset number (channel number on older DTR models) or they will not communicate with one another

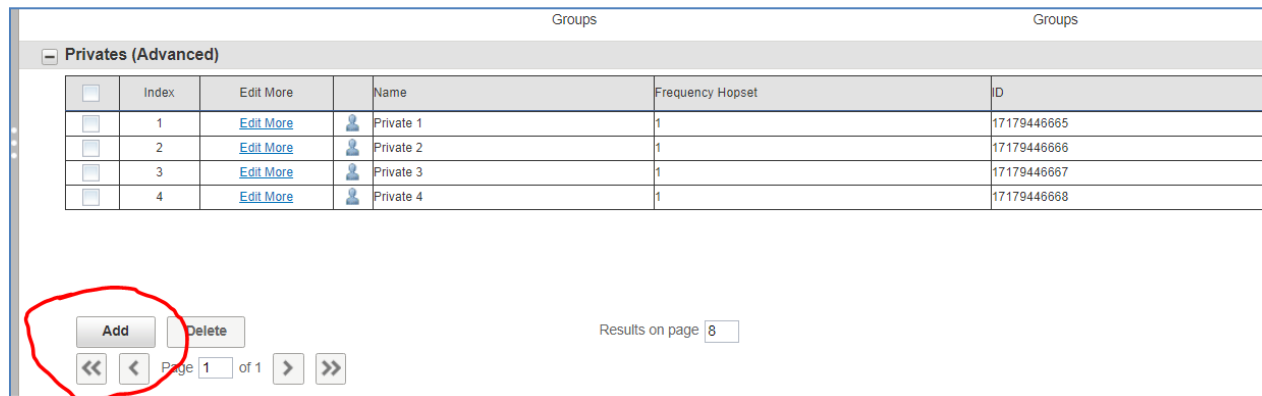

#### 4. Add any desired Private Groups




5. Name your private groups, and add the private contacts that you want to access that specific group from the list below

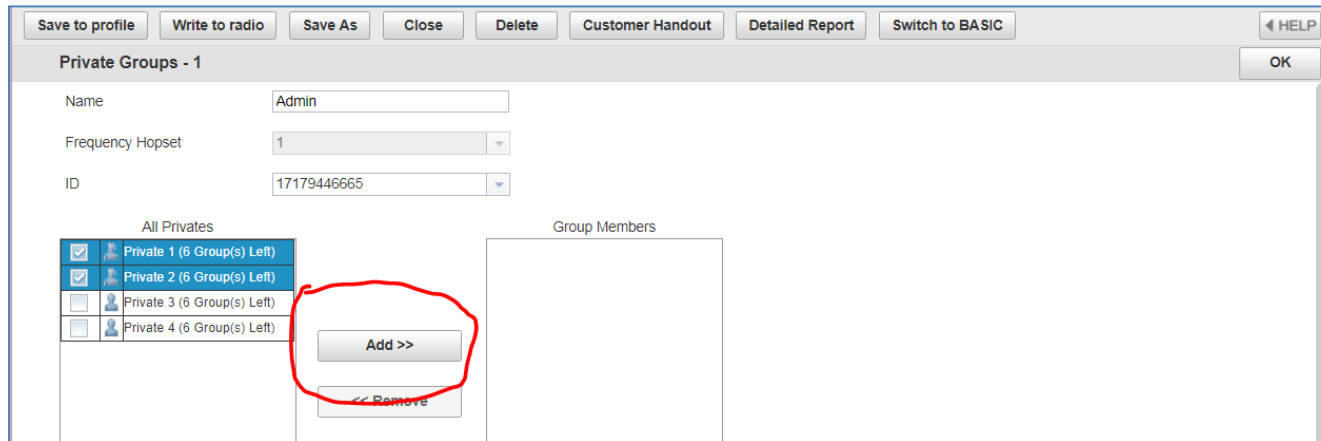

6. Repeat as desired for the remainder of your private groups

a. A private ID can only be added in up to 7 private groups total

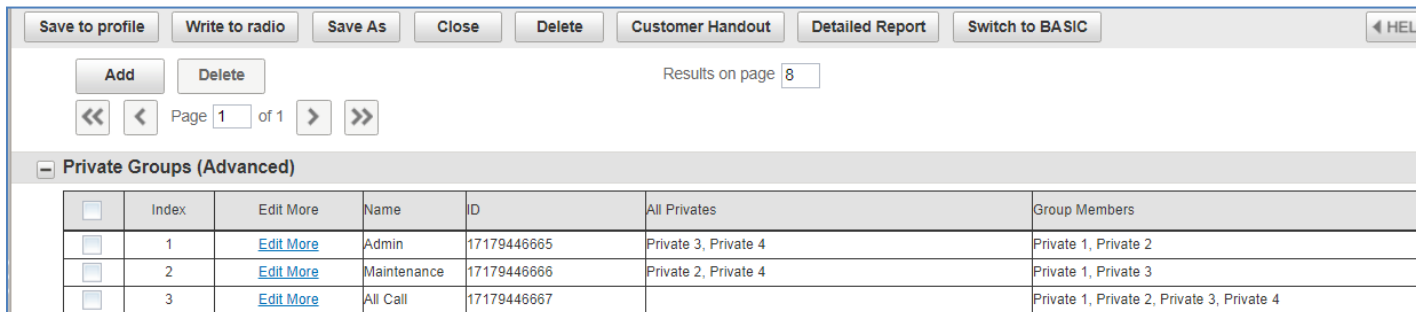

## 7. Check the "Scan Mode" checkbox in the Scan List section

Save to profile Write to radio Save As Close Delete Customer Handout Detailed Report Switch to BASIC HELP

Add Delete Results on page 8

Page 1 of 3

**Scan List (Advanced)**

Scan Mode

Scan Option Public Group and Private Group

Index	Edit More	Frequency Hopset	All Public Groups	Scan List Members
1	<a href="#">Edit More</a>	1	ProfileID 06, ProfileID 07, ProfileID 08, ProfileID 09, ProfileID 10, ProfileID 11, ProfileID 12, ProfileID 13, ProfileID 14, ProfileID 15, ProfileID 16, ProfileID 17, ProfileID 18	ProfileID 01, ProfileID 02, ProfileID 03, ProfileID 04, ProfileID 05
2	<a href="#">Edit More</a>	2		
3	<a href="#">Edit More</a>	3		
4	<a href="#">Edit More</a>	4		
5	<a href="#">Edit More</a>	5		
6	<a href="#">Edit More</a>	6		
7	<a href="#">Edit More</a>	7		
8	<a href="#">Edit More</a>	8		

## 8. Switch back over to BASIC view

Save to profile Write to radio Save As Close Delete Customer Handout Detailed Report Switch to BASIC HELP

**Advanced View Setting (Advanced)**

Profile ID Number Lock

**Contacts (Advanced)**

Maximum Contacts 200 Current Number of Contacts 27

Current Number of Privates 4 Current Number of Private Groups 3 Current Number of Public Groups 20

**Privates (Advanced)**

<input type="checkbox"/>	Index	Edit More	Name	Frequency Hopset	ID
<input type="checkbox"/>	1	<a href="#">Edit More</a>	Private 1	1	17179446665
<input type="checkbox"/>	2	<a href="#">Edit More</a>	Private 2	1	17179446666
<input type="checkbox"/>	3	<a href="#">Edit More</a>	Private 3	1	17179446667
<input type="checkbox"/>	4	<a href="#">Edit More</a>	Private 4	1	17179446668

9. Either Add or Edit an existing channel in your Channel list to enable the private group in the scroll list
- a. It's recommended to Delete excess public group (profile ID mode) channels to eliminate confusion

Channels (Basic)

Home Channel: OFF

Home Channel Mode: N/A

<input type="checkbox"/>	Index	Edit More	Name	Mode	Channel Mapping
<input type="checkbox"/>	1	<a href="#">Edit More</a>	Channel 01	Profile ID	1
<input type="checkbox"/>	2	<a href="#">Edit More</a>	Channel 02	Profile ID	2
<input type="checkbox"/>	3	<a href="#">Edit More</a>	Channel 03	Profile ID	3
<input type="checkbox"/>	4	<a href="#">Edit More</a>	Channel 04	Profile ID	4
<input type="checkbox"/>	5	<a href="#">Edit More</a>	Channel 05	Profile ID	5
<input type="checkbox"/>	6	<a href="#">Edit More</a>	Channel 06	Profile ID	6
<input type="checkbox"/>	7	<a href="#">Edit More</a>	Channel 07	Profile ID	7
<input type="checkbox"/>	8	<a href="#">Edit More</a>	Channel 08	Profile ID	8

Results on page 8

10. Edit the specific channel mode to "Private Group" and Map it to the desired group channel

Save to profile Write to radio Save As Close Delete Customer Handout Detailed Report Switch to ADVANCED HELP

Channels - 1 OK

Name: Channel 01

Disable Channel:

Mode: Private Group Channel Mapping: Admin

11. Rename the channels so that they properly display the private group name when scrolling

Channels (Basic)

Home Channel: OFF

Home Channel Mode: N/A

<input type="checkbox"/>	Index	Edit More	Name	Mode	Channel Mapping
<input type="checkbox"/>	1	<a href="#">Edit More</a>	All Call	Private Group	All Call
<input type="checkbox"/>	2	<a href="#">Edit More</a>	Admin	Private Group	Admin
<input type="checkbox"/>	3	<a href="#">Edit More</a>	Maintenance	Private Group	Maintenance
<input type="checkbox"/>	4	<a href="#">Edit More</a>	Channel 04	Profile ID	4
<input type="checkbox"/>	5	<a href="#">Edit More</a>	Channel 05	Profile ID	5
<input type="checkbox"/>	6	<a href="#">Edit More</a>	Channel 06	Profile ID	6

Results on page 8

12. Re-program all radios to the new settings. Test by finding a private group in the scroll list or contact list and pressing the PTT to initiate a call. If setup properly, your radio will be interrupted and keyed up when a private group transmission begins so that you can always hear the transmission.



Wireless Solutions

888-339-0217

[sales@wirelessradios.com](mailto:sales@wirelessradios.com)